# This test summary, downloaded from the BESA website, indicates that the HIU listed below has been tested against the criteria of the BESA HIU Test Regime.



4b

Model:			
Serial Number:			
Year of manufacture:			
Test carried out by On:	Reference:		
		HIGH TEMP	LOW TEMP
NOTE: The VWART accuracy is in the range +/-2°C		VWART °C	VWART °C
DHW			
Keep-warm			
Space heating			
Overall with keep warm			
[ ·		I	1
Pressure test			
No HIU damage			
Dynamic DHW operation		2a	
DHW not exceed 65°C			
Low flow test at BESA flow rate of 0.021/s		3a	3b
DHW not exceed 65°C		30	3.0
DHW temperature at set point +/- 3°C			
Low flow test at manufacturer declared flow rate		3c	3d
Declared minimum flow rate (I/sec)			
Not exceed 65°C			
DHW temperature at set point +/- 3°C			
Keep-warm test		4a	4b
Standby heat consumption - average (Watts)			
Standby electricity consumption - average (Watts)			
Total HIU heat loss (DH + electrical input) (Watts)			
Standby flow rate (the average flow rate) (I/hr)			
DHW Response time test		5a	5b
DHW response time (Seconds)		34	3.0
Peak electrical heat during test (Watts)			
Output			
DHW temperature not exceed 65°C for more than 10 secs			
DHW reaches 45°C with 15 secs			
Coaling viels accessment as defined in 2.20	If any of the feature h	alou accur than the rich	k of scaling of the DINA
Scaling risk assessment as defined in 2.26	If any of the factors below occur then the risk of scaling of the DHV PHE in hard water areas increases		
HIU has a TMV or TRV on the DHW			
Test	2a	3a	3c
t32 above 60°C for more than 5 secs			
t12 exceeds 55°C at any point of the test			

4a

Test

 $t12\ exceeds\ 50^{\circ}C$  at any time

Photo of HIU being tested with the cover off.	

Photo of HIU being tested with the cover on.

Photo of Manufacturers label and serial number.

# **COMPONENT DATA AND DOCUMENTATION**

Component and Part No.	Manufacturer and Type	Documents submitted

Schematic diagram and drawing showing the structure and arrangement of the HIU with dimensions and weight	
Technical specification for electronic components including version of software	
Installation guide	
Commissioning guide	
Operation guide with a function description/ description of operations and care instructions as suited to the intended user category	
Declaration of Conformity for CE-marked HIUs	
Full parameter list for electronically controlled HIUs	

HIU Marking	Comment	Info present
Model name and type no.		
Serial no.		

# HIU MANUFACTURERS' DECLARED INFORMATION (TO BE COMPLETED BY THE MANUFACTURER)

HIU Model	
Part No.	
Software version	
Test Date:	
Test No.	

DIMENSIONAL INFORMATION	
Dimensions with casing (HxDxW) (mm)	
Primary connections top/bottom	
Secondary HTG connections top/bottom	
Secondary BCW/DHW connections top/bottom	
Connection sizes Prim/Sec DHW/Sec HTG (mm)	
Empty weight kg** (Kg)	
Operating weight kg** (Kg)	

ELECTRICAL INFORMATION	
Power supply (230V 1 phase)	230V 1~
Maximum power (Watts)	
Standby power demand (Watts)	

HYDRAULIC INFORMATION	
Maximum primary pressure (Bar g)	
Maximum primary temperature (°C)	
Primary water volume (I)	
Maximum secondary DHW pressure (Bar g)	
Maximum secondary DHW temperature (°C)	
Secondary DHW water volume (I)	
Maximum secondary HTG pressure (Bar g)	
Maximum secondary HTG temperature (°C)	
Primary operating DP range min/max (kPa)	

DECLARED MAXIMUM PERFORMANCE LT TEST CONDITIONS	
DHW	
Maximum DHW production at 70°C (kW)	
Primary flow temperature (°C)	70
Primary return temperature (°C)	
Primary flow (m3/h)	
Primary △P* (kPa)	
Secondary in/out temperature (°C)	10/55
Secondary △P (bar)	
HTG	
Maximum HTG production (kW)	
Primary flow temprature (°C)	70
Primary return temperature (°C)	
Primary △P* (bar)	
Secondary in/out temperature (°C)	40/60
Secondary available DP at the output of HIU	

DECLARED MAXIMUM PERFORMANCE LT TEST CONDITIONS	
DHW	
Maximum DHW production at 60°C (kW)	
Primary flow temperature (°C)	60
Primary return temperature (°C)	
Primary flow (m³/h)	
Primary △P* (kPa)	
Secondary in/out temprature (°C)	10/50
Secondary △P (bar)	
HTG	
Maximum HTG production (kW)	
Primary flow temprature (°C)	60
Primary return temperature (°C)	
Primary △P* (bar)	
Secondary in/out temperature (°C)	35/45
Secondary avialable DP at the output of the HIU (kPa)	
HIU P&ID supplied by manufacturer with a legend for the components	

<sup>\*</sup>DP pressure not to include HM. Designers must add HM pressure drop.

The information included in this page is for the specific model of HIU detailed in this test report. It is additional information voluntarily provided by the manufacturer who is solely accountable for the details sumbmitted.

# **MANUFACTURERS' DECLARATION**

This is to confirm that the information supplied by accurate representation of the product listed on the BESA HIU Register.

Signed Position Company

# **COMMENTS/HISTORY**











<sup>\*\*</sup> Including HIU, casing and wall hung bracket



# BESA HIU TEST REPORT Assure HiMax Twin ID 90/30

**Client: Baxi Heating Ltd** 

Project Number: E4729 Report Issue: 2

21 July 2022

Prepared By: <

Simon Broxham – Principal Engineer

Approved By:

Josh Welburn – Project Engineering Manager



# THIS PAGE IS INTENTIONALLY LEFT BLANK

#### **DISCLAIMER**

This report is confidential to the client named on the front cover.

This report may be stored, transmitted, or reproduced in full by the named client, however if the report is to be placed in the public domain or used for publicity / promotional purposes please inform a director of Enertek International Ltd.

The report must not be reproduced in part, edited, abridged or any extracts used for any purpose whatsoever without written permission from a director of Enertek International Ltd.

The client remains responsible for any data supplied by the client for use in this report. If this data could affect the test results this will be noted in the report.

Any test results contained in this report apply only to the specific sample(s) tested as described in the report.

This report does not imply or indicate any element of commercial approval, recommendation, or promotion by Enertek International Ltd.



# **CONTENTS**

1	BRII	EF	6
2	DEF	INITIONS	7
3	TES	T OBJECT	8
	3.1	Appliance Details	8
	3.2	Appliance Design Pressures	8
	3.3	Appliance Design Temperatures	8
4	TES	T METHOD	9
	4.1	Installation of Appliance	9
	4.2	Test Regime	9
	4.3	Measurement & Uncertainties	9
5	TES	T RESULTS	. 14
	5.1	Test 0 – Pressure Test	. 14
	5.2	Test 1a to 1f – Space Heating 1-4 kW at 70 and 60°C	. 14
	5.3	Test 2a – DHW Dynamic Tapping at 70 °C	. 15
	5.4	Test 2b – DHW Dynamic Tapping at 60 °C	. 15
	5.5	Test 3a– Low Flow DHW at 70 °C	. 15
	5.6	Test 3b – Low Flow DHW at 60 °C	. 15
	5.7	Test 4a – Keep-Warm at 70 °C	. 16
	5.8	Test 4b – Keep-Warm at 60 °C	. 16
	5.9	Test 5a – DHW Response Time at 70 °C	. 17
	5.10	Test 5b – DHW Response Time at 60 °C	. 17
	5.11	Overall Scaling Risk Assessment	. 18
	5.12	VWART Calculations	. 19
6	CON	NCLUSIONS	20
7	APP	ENDIX A	21
	7.1	Key Metric Plots	. 21
	7.2	Key Metric and VWART Summary	.36
8	APP	ENDIX B	39
	8.1	Appliance Documentation	. 39
	8.2	Appliance Photographs	. 40
	8.3	Calibrations and Uncertainties	43



#### **LIST OF FIGURES**

Figure 4.1 – EIL's HIU Test Rig Schematic	10
Figure 7.1 - Test 1a – Space Heating 1 kW at 70 °C	22
Figure 7.2 - Test 1b – Space Heating 2 kW at 70 °C	23
Figure 7.3 - Test 1c – Space Heating 4 kW at 70 °C	24
Figure 7.4 - Test 1d – Space Heating 1 kW at 60 °C	25
Figure 7.5 - Test 1e – Space Heating 2 kW at 60 °C	26
Figure 7.6 - Test 1f – Space Heating 4 kW at 60 °C	27
Figure 7.7 - Test 2a – DHW only at 70 °C	28
Figure 7.8 - Test 2b – DHW only at 60 °C	29
Figure 7.9 - Test 3a – Low Flow DHW at 70 °C	30
Figure 7.10 - Test 3b – Low Flow DHW at 60 °C	31
Figure 7.11 - Test 4a – Keep-Warm at 70 °C	32
Figure 7.12 - Test 4b – Keep-Warm at 60 °C	33
Figure 7.13 - Test 5a – DHW Response Time at 70 °C	34
Figure 7.14 - Test 5b – DHW Response Time at 60 °C	35
Figure 8.1 – Photograph of Appliance [Case Fitted]	40
Figure 8.2 – Photograph of Appliance [Case Removed]	41
Figure 8.3 – Appliance Data Label	42
LIST OF TABLES	
Table 2.1 – Definitions and Abbreviations	7
Table 3.1 – Appliance Details	8
Table 3.2 – Appliance Design Pressures	8
Table 3.3 – Appliance Design Temperatures	8
Table 4.1 – Setup of Tests (Based on BESA Test Regime, Table 1: Test Schedule)	11
Table 4.2 – Test Reporting, (Adapted from BESA Test Regime, Table 5)	12
Table 5.1 - Test Results for Space Heating Tests 1a to 1f	14
Table 5.2 - Overall Scaling Risk Assessment	18
Table 5.3 – High Temperature VWART Calculations	19
Table 5.4 – Low Temperature VWART Calculations	19
Table 7.1 - Key Metrics of High Temperature Package	37
Table 7.2 - Key Metrics of Low Temperature Package	38
Table 8.1 – Documentation Supplied	39
Table 8.2 - FIL Fauinment Calibration and Uncertainties	/12



## 1 BRIEF

- 1.1.1 Enertek international Limited (EIL), were contracted to receive, install, and commission a production sample, of the Baxi Assure HiMax Twin ID 90/30 HIU.
- 1.1.2 To carry out the work involved to evaluate the performance of Domestic Hot Water (DHW) and Space Heating (SH) in accordance with the BESA UK HIU Test regime Technical Specification, Rev-009 October 2018, a publicly available online test regime. This is here-on referred to as the Test Regime throughout this document.
- 1.1.3 To provide a report detailing the tests carried out and generated results in accordance with the Test Regime criteria, including calculations for Volume Weighted Average Return Temperatures (VWART).



# 2 **DEFINITIONS**

2.1.1 The following definitions and abbreviations which have been used within this report can be found in table 2.1 below.

Table 2.1 – Definitions and Abbreviations

Symbol	Description	Unit
P <sub>1</sub>	Power, Primary Side	kW
P <sub>2</sub>	Power, Space Heating Side	kW
P <sub>3</sub>	Power, Domestic Hot Water	kW
t <sub>11</sub>	Temperature, Primary Side Supply Connection	°C
t <sub>12</sub>	Temperature, Primary Side Return Connection	°C
t <sub>21</sub>	Temperature, Space Heating Side Return Connection	°C
t <sub>22</sub>	Temperature, Space Heating System Supply Connection	°C
t <sub>31</sub>	Temperature, Cold Water Supply	°C
t <sub>32</sub>	Temperature, Domestic Hot Water Output from HIU	°C
$q_1$	Volume Flow, Primary Side	L/s
$q_2$	Volume Flow, Space Heating Side	L/s
$q_3$	Volume Flow, Domestic Hot Water	L/s
$\Delta p_1$	Primary Pressure Drop Across Entire HIU Unit	kPa
$\Delta p_2$	Pressure Drop, Space Heating System Across HIU	kPa
$\Delta p_3$	Pressure Drop, Domestic Hot Water Across HIU	kPa
VWART <sub>DHW</sub>	DHW Volume Weighted Return Temperature	°C
VWART <sub>SH</sub>	Space Heating Volume Weighted Return Temperature	°C
VWART <sub>KWH</sub>	Keep Warm Volume Weighted Return Temperature	°C
VWART <sub>HEAT</sub>	Annual Volume Weighted Return Temperature for Heating Period	°C
VWART <sub>NONHEAT</sub>	Annual Volume Weighed Return Temperature for Non-Heating	°C
VWART <sub>HIU</sub>	Total Annual Volume Weighted Return Temperature	°C
DHW	Domestic Hot Water	_
HIU	Heat Interface Unit	_
SH	Space Heating	_
TMV	Thermostatic Mixing Valve	_
EIL	Enertek International Limited	-



# 3 TEST OBJECT

# 3.1 Appliance Details

3.1.1 Details of the HIU Assure HiMax Twin ID 90/30 appliance are given in Table 3.1. Photograph of the installed appliance is given in Figure 8.2.

**Table 3.1 – Appliance Details** 

Item	Description
Manufacturer	Baxi Heating Ltd
Model	Assure HiMax Twin ID 90/30
Serial Number	TJB220810001AR
Year of Manufacture	2022
DHW Priority	Yes

# 3.2 Appliance Design Pressures

3.2.1 The maximum design pressures of the Assure HiMax Twin ID 90/30 appliance for the primary side and the secondary side for both Space Heating and DHW are given in Table 3.2.

**Table 3.2 – Appliance Design Pressures** 

Item	Value	Unit
Primary Side	16	Bar
Secondary Side Space Heating	3	Bar
Secondary Side DHW	10	Bar

## 3.3 Appliance Design Temperatures

3.3.1 The maximum design temperatures of the Assure HiMax Twin ID 90/30 appliance for the primary and secondary sides for both Space Heating and DHW are given in Table 3.3

**Table 3.3 – Appliance Design Temperatures** 

Item	Value	Unit
Primary Side	85	°
Secondary Side Space Heating	85	°C
Secondary Side DHW	65	°C



# 4 TEST METHOD

## 4.1 Installation of Appliance

4.1.1 The appliance was installed and commissioned (as received) and as defined in the product literature provided. Testing was carried out without further adjustment other than disabling the internal space heating pump and adjusting the setting of the SH and DHW set points through the user interface on the HIU controller to suit the conditions of the HIU test rig. The HIU rig schematic is given in Figure 4.1.

### 4.2 Test Regime

- 4.2.1 The testing described in this report was carried out in accordance with the BESA Test Regime. The Test Regime outlines a series of static and dynamic tests to determine the performance of a HIU's DHW and SH functions. The Regime outlines the test method including the reporting of the results, the performance requirements and the VWART calculations.
- 4.2.2 The setup of the BESA tests is reproduced in Table 4.1. The basis of reporting the performance of the HIU from the BESA Test Regime is reproduced in Table 4.2.
- 4.2.3 The Test Regime specifies the testing of two different test temperature packages. The first is the high temperature package, with a district primary supply of 70 °C and the second is the 'low temperature' package, with a district primary supply temperature of 60 °C.
- 4.2.4 As the Baxi Assure HiMax Twin ID 90/30 is suitable for both high and low temperature operation, both test packages were carried out and results recorded within this report.

#### 4.3 Measurement & Uncertainties

- 4.3.1 All measurements and uncertainties adhere to the requirements stipulated in the BESA Test Regime. All measurements were sampled at a rate of 1 Hz for all tests.
- 4.3.2 The BESA uncertainties of measurement requirements are as follows: Differential Pressure,  $\pm$  1 kPa; Temperature,  $\pm$  0.1 °C; Volume Flow,  $\pm$  1.5 %. Note: the time constant for the temperature sensors is less than 1.5 s.
- 4.3.3 EIL's reported uncertainty is based on a standard uncertainty by a coverage factor K=2, providing a level of confidence of approximately 95%. The uncertainty evaluation has been carried out in accordance with UKAS requirements. The EIL equipment list and uncertainties are given in Table 8.2, Appendix B.



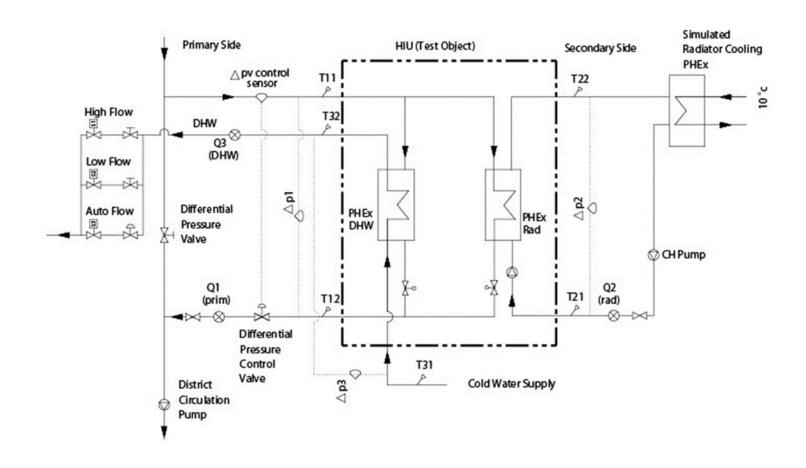


Figure 4.1 – EIL's HIU Test Rig Schematic



Table 4.1 – Setup of Tests (Based on BESA Test Regime, Table 1: Test Schedule)

		Dis	trict Circu	ıit	Dome	estic Hot	Water	Sp	асе Неа	ting
		Static Pressure	Differential Pressure	Flow Temperature	Temperature Set Point	Flow Rate	Heat Load	Flow Temperature	Return Temperature	Heat Load
Symb	ool	[p <sub>1</sub> ]	[∆p₁]	[t <sub>11</sub> ]	[t <sub>32</sub> ]	[q <sub>3</sub> ]	[P <sub>3</sub> ]	[t <sub>22</sub> ]	[t <sub>21</sub> ]	[P <sub>2</sub> ]
Units		[kPa]	[kPa]	[°C]	[°C]	[Ls <sup>-1</sup> ]	[kW]	[°C]	[°C]	[kW]
Statio	Tests									
0a	District Pressure Test	1.43 X Claim ed Value	-	-	-	-	-	-	-	-
1a	1kW Space Heating	3.0	0.5	70	-	-	-	60	40	1
1b	2kW Space Heating	3.0	0.5	70	-	-	-	60	40	2
1c	4kW Space Heating	3.0	0.5	70	-	-	-	60	40	4
1d	1kW Space Heating	3.0	0.5	60	-	-	-	45	35	1
1e	2kW Space Heating	3.0	0.5	60	-	-	-	45	35	2
1f	4kW Space Heating	3.0	0.5	60	-	-	-	45	35	4
Dyna	mic Tests									
2a	Dynamic Tapping	3.0	0.5	70	55	See	See	-	-	-
2b	Dynamic Tapping	3.0	0.5	60	50	Test Profi le	Test Profile	-	-	-
3a	Low Flow	3.0	0.5	70	55	0.02	Record Value	-	-	-
3b	Low Flow	3.0	0.5	60	50	0.02	Record Value	-	-	-
4a	Keep-Warm	3.0	0.5	70	55	0.00	0	-	-	-
4b	Keep-Warm	3.0	0.5	60	50	0.00	0	-	-	-
5a	DHW Response	3.0	0.5	70	55	0.13	Record Value	-	-	-
5b	DHW Response	3.0	0.5	60	50	0.13	Record Value	-	-	-



Table 4.2 – Test Reporting, (Adapted from BESA Test Regime, Table 5)

Tes	t Designation	Reporting
0	District Pressure Test	Pass/Fail as to whether HIU manages pressure test without leaks or damage.
1a	Space Heating 1 kW, 60/40 °C Secondary	$t_{11}$ – Primary flow temperature. $t_{12}$ – Primary return temperature.
1b	Space Heating 2 kW,	Plot of key metrics over duration of test.
1c	60/40 °C Secondary  Space Heating 4 kW, 60/40 °C Secondary	<b>Note</b> : Outputs used as input data to 'High Temperature' Space Heating Volume Weighted Average Return Temperature calculation.
1d	Space Heating 1 kW, 45/35 ° Secondary	$t_{11}$ – Primary flow temperature. $t_{12}$ – Primary return temperature.
1e	Space Heating 2 kW, 45/35 °C Secondary	Plot of key metrics over duration of test.
1f	Space Heating 4 kW, 45/35 °C Secondary	<b>Note</b> : Outputs used as input data to 'Low Temperature' Space Heating Volume Weighted Average Return Temperature calculation.
2a	DHW only, DH 70 °C Flow, 55 °C DHW	Pass/Fail on DHW (at $t_{32}$ ) exceeding 65.0 °C (to 1 decimal point) for more than 10 consecutive seconds. State the maximum and minimum DHW temperatures over the period of the test when there is a DHW flow. Assessment of scaling risk as per the criteria detailed in 2.26. Note: Outputs used as input data to 'High Temperature' Space Heating Volume Weighted Average Return Temperature calculation. Plot $t_{32}$ , $t_{31}$ , $t_{31}$ , $t_{12}$ , $t_{12}$
2b	DHW only, DH 60 °C Flow, 50 °C DHW	State the maximum and minimum DHW temperatures over the period of the test when there is a DHW flow. <b>Note:</b> Outputs used as input data to 'Low Temperature' Domestic Hot Water Volume Weighted Average Return Temperature calculation. Plot $q_1$ , $q_3$ , $dp_1$ , $dp_3$
3a	Low Flow DHW, DH 70 °C Flow, 55 °C DHW	Pass/Fail on DHW (at $t_{32}$ ) exceeding 65.0 °C (1 decimal place) for more than 10 consecutive seconds. Comment on ability to deliver DHW at low flow based on DHW temperature reaching at least 45.0 °C (1 decimal place) at the end of the 180 second period of low flow DHW. Comment on the ability to deliver stable DHW flow temperature (at $t_{32}$ ), defined as ability to maintain 55.0 +/- 3.0 °C (1 decimal place) during the last 60 seconds of the test. Maximum temperature achieved and +/-°C variance around 55.0 °C (1 decimal place) to be stated. Plot of key metrics for 60 seconds of 0.13 l/s flow and the subsequent 180 seconds of 0.02 l/s DHW flow. Assessment of scaling risk as per criteria detailed in 2.26.
3b	Low Flow DHW, DH 60 °C Flow, 50 °C DHW	Comment on the ability to deliver DHW at low flow rate based on DHW temperature reaching at least 45 °C (1 decimal place) at the end of the 180 second period of low flow DHW. Comment on the ability to deliver stable DHW flow temperature (at $t_{32}$ ), defined as ability to maintain 50.0 +/-3°C (1 decimal place) to be stated. Maximum temperature achieved and +/-°C variance around 50.0°C (1 decimal place) to be stated. Plot of key metrics for 60 seconds of 0.13 l/s flow and the subsequent 180 seconds of 0.02 l/s DHW flow.



Tes	t Designation	Reporting
4a	Keep-Warm, DH 70 °C Flow, 55 °C DHW	Assessment of whether valid Keep-Warm operation, based on 5a response time criteria: Pass/Fail.  Comment on HIU Keep-Warm controls options.  Assessment of scaling risk based on duration of temperatures in excess of 55.0 °C (1 decimal place).  State average heat load for the duration of the test.  State the average primary flow rate for the duration of the test.  Note: Outputs used as input data to 'High Temperature' Keep-Warm Volume Weighted Average Return Temperature calculation.  Plot of key metrics over duration of test.
4b	Keep-Warm, DH 60 °C Flow, 50 °C DHW	Assessment of whether valid Keep-Warm operation, based on 5a response time criteria: Pass/Fail.  Observation on the operation of the HIU during Keep-Warm. Comment on HIU Keep-Warm controls options.  Assessment of scaling risk based on extent and duration of temperatures in excess of 55.0 °C (1 decimal place).  State average heat load for the duration of the test.  State the average primary flowrate for the duration of the test.  Note: Outputs used as input data to 'Low Temperature' Keep-Warm Volume Weighted Average Return Temperature calculation.  Plot of key metrics over duration of test.
5a	DHW Response Time, DH 70 °C Flow, 55 °C DHW	Pass/Fail on DHW (at $t_{32}$ ) exceeding 65.0 °C (1 decimal place) for more than 10 consecutive seconds. State time to achieve 45.0 °C (1 decimal place) and not subsequently drop below 42.0 °C (1 decimal place). Plot $t_{32}$ , $t_{31}$ , $t_{12}$ , $q_1$ over duration of test.
5b	DHW Response Time, DH 60 °C Flow, 50 °C DHW	State time to achieve a DHW temperature 45.0 °C (1 decimal place) and not subsequently drop below 42.0 °C (1 decimal place). Comment on stability of DHW temperature. Plot $t_{32}$ , $t_{31}$ , $t_{12}$ , $q_1$ over duration of test.



# 5 TEST RESULTS

#### 5.1 Test 0 – Pressure Test

- 5.1.1 The appliance has passed the requirements of the static pressure test, Test 0 of the BESA Test Regime as:
- 5.1.2 There was No damage observed during the static pressure test, with the primary flow pressurised to 22.88 bar (1.43 times the rated value), and,
- 5.1.3 There were No leaks observed during the static pressure test, with the primary flow pressurised to 22.88 bar (1.43 times the rated value).

# 5.2 Test 1a to 1f – Space Heating 1-4 kW at 70 and 60°C

5.2.1 The plot of the key metrics of Tests 1a-1f for the space heating 1 - 4 kW at both 70 and 60 °C are displayed in Figure 7.1 to Figure 7.6 respectively. See Table 5.1 for summarised test results including the average primary return temperature,  $t_{12}$ .

Table 5.1 - Test Results for Space Heating Tests 1a to 1f

	Primary					Secondary				
Test No & Description	Flow Temperature	Return Temperature	Flow Rate	Differential Pressure	Heat Load	Return Temperature	Flow Temperature	Flow Rate	Differential Pressure	Heat Load
	[t <sub>11</sub> ]	[t <sub>12</sub> ]	[q <sub>1</sub> ]	[∆p₁]	[P <sub>1</sub> ]	[t <sub>21</sub> ]	[t <sub>22</sub> ]	[q <sub>2</sub> ]	[∆p₂]	[P <sub>2</sub> ]
	[°C]	[°C]	[Ls <sup>-1</sup> ]	[kPa]	[W]	[°C]	[°C]	[Ls <sup>-</sup> ]	[kPa]	[W]
1a - 1 kW Space Heating (DH 70 °C flow)	70.0	41.3	0.010	51.9	1211	40.1	59.8	0.014	-1.1	1100
1b - 2 kW Space Heating (DH 70 °C flow)	69.8	42.4	0.019	50.5	2073	40.0	59.6	0.024	-0.6	2010
1c - 4 kW Space Heating (DH 70 °C flow)	70.1	43.1	0.035	50.6	3946	40.0	59.5	0.048	0.2	3950
1d - Space Heating 1 kW (DH 60 °C flow)	59.9	35.3	0.010	56.4	1071	35.3	44.7	0.025	-0.7	1010
1e - Space Heating 2 kW (DH 60 °C flow)	60.5	35.0	0.020	50.3	2074	34.6	44.6	0.048	0.1	2020
1f - Space Heating 4 kW (DH 60 °C flow)	60.2	35.5	0.039	49.6	3984	34.9	44.9	0.094	2.9	3940



## 5.3 Test 2a – DHW Dynamic Tapping at 70 °C

- 5.3.1 The appliance has passed the requirements of the DHW only at 70 °C, Test 2a of the BESA Test Regime as:
- 5.3.2 The domestic hot water output temperature,  $t_{32}$  did not exceed 65 °C for more than 10 seconds.
- 5.3.3 The maximum and minimum temperatures of  $t_{32}$  were 63.4 °C and 46.9 °C respectively.
- 5.3.4 The plot of the key metrics of the duration of Test 2a is displayed in Figure 7.7, Appendix A.

## 5.4 Test 2b – DHW Dynamic Tapping at 60 °C

- 5.4.1 The maximum and minimum temperatures of  $t_{32}$  were 54.52 °C and 44.01 °C respectively.
- 5.4.2 The plot of the key metrics of the duration of Test 2b is displayed in Figure 7.8, Appendix A.

#### 5.5 Test 3a – Low Flow DHW at 70 °C

- 5.5.1 The appliance has passed the requirements of the Low Flow at 70 °C, Test 3a of the BESA Test Regime as:
- 5.5.2 The domestic hot water output temperature,  $t_{32}$  did not exceed 65 °C for more than 10 seconds.
- 5.5.3 The appliance did maintain the DHW output temperature,  $t_{32}$  at 55  $\pm$  3 °C during the last 60 seconds of the test.
- 5.5.4 The maximum and minimum temperatures of  $t_{32}$  were 58.14 °C and 49.91 °C respectively.
- 5.5.5 The plot of the key metrics of the duration of Test 3a is displayed in Figure 7.9, Appendix A.

#### 5.6 Test 3b – Low Flow DHW at 60 °C

- 5.6.1 The appliance has passed the requirements of the low flow at 60 °C, Test 3b of the BESA Test regime as:
- 5.6.2 The maximum and minimum temperatures of t<sub>32</sub> were 52.19 °C and 46.38 °C respectively.
- 5.6.3 The plot of the key metrics of the duration of Test 3b is displayed in Figure 7.10, Appendix A.



## 5.7 Test 4a – Keep-Warm at 70 °C

- 5.7.1 The appliance has passed the requirements of the Keep-Warm at 70 °C, Test 4a of the BESA Test Regime as:
- 5.7.2 This is a valid Keep-Warm operation based on 5a response time criteria, see 5.9.3.
- 5.7.3 The appliance is performing Keep-Warm cycling as the primary flow temperature,  $t_{11}$  varies by more than  $\pm$  3 °C during the final 3 hours of the test. Please see BESA HIU standard technical note TN-018 Version 1 for a more detailed definition of cyclical data.
- 5.7.4 The average heat load on the primary side  $P_1$  is 42 W.
- 5.7.5 The average primary flow  $q_1$  over the 8 hours test was 3.3 l/hr.
- 5.7.6 The Keep-Warm control was set to 39 °C.
- 5.7.7 The plot of the key metrics of the duration of Test 4a is displayed in Figure 7.11, Appendix A.

#### 5.8 Test 4b – Keep-Warm at 60 °C

- 5.8.1 The appliance has passed the requirements of the Keep-warm at 60 °C, Test 4b of the BESA Test Regime as:
- 5.8.2 This is a valid Keep-Warm operation based on 5b response time criteria, see 5.10.1.
- 5.8.3 The appliance is performing Keep-Warm cycling as the primary flow temperature,  $t_{11}$  varies by more than  $\pm$  3 °C during the final 3 hours of the test. Please see BESA HIU standard technical note TN-018 Version 1 for a more detailed definition of cyclical data.
- 5.8.4 The average heat load on the primary side  $P_1$  is 42 W.
- 5.8.5 The average primary flow  $q_1$  over the 8 hours test was 5.3 l/hr.
- 5.8.6 The Keep-Warm control was set to 39 °C.
- 5.8.7 The plot of the key metrics of the duration of Test 4b is displayed in Figure 7.12, Appendix A.



## 5.9 Test 5a – DHW Response Time at 70 °C

- 5.9.1 The appliance has passed the requirements of DHW Response Time at 70 °C, Test 5a of the BESA Test Regime as:
- 5.9.2 The domestic hot water output temperature,  $t_{32}$  did not exceed 65 °C for more than 10 seconds.
- 5.9.3 The DHW response time for  $t_{32}$  to reach 45 °C (and not subsequently drop below 42 °C) was 13 seconds; therefore this is a valid keep warm.
- 5.9.4 The plot of the key metrics of the duration of Test 5a is displayed in Figure 7.13, Appendix A.

# 5.10 Test 5b – DHW Response Time at 60 °C

- 5.10.1 The DHW response time for  $t_{32}$  to reach 45 °C (and not subsequently drop below 42 °C) was 15 seconds; therefore this is a valid keep warm.
- 5.10.2 The plot of the key metrics of the duration of Test 5b is displayed in Figure 7.14, Appendix A.



# **5.11** Overall Scaling Risk Assessment

5.11.1 If any of the below factors occur, then the risk of scaling of the DHW plate in hard water areas increases.

Table 5.2 - Overall Scaling Risk Assessment

HIU has a TMV or TRV on the output of the DHW plate heat exchanger	No			
Test Designation	<b>2</b> a	<b>3</b> a		
t <sub>32</sub> above 60°C for more than 5 seconds	No	No		
$t_{12}$ exceeds 55°C at any point of the test	No	No		
Test Designation	<b>4</b> a	4b		
t <sub>12</sub> exceeds 50°C at any time	No	No		



## 5.12 VWART Calculations

5.12.1 The Volume Weighted Average Return Temperatures (VWART) have been calculated as stipulated in the BESA UK HIU Test Regime document. The calculated VWART values for both the high temperature and low temperature tests described in this report are given below in Table 5.3 and Table 5.4 respectively.

**Table 5.3 – High Temperature VWART Calculations** 

Description	Symbol	Value	Unit
Annual Heating Period Percentage	$SH_{PROP}$	7.1	%
Annual Non-Heating Period Percentage	$NSH_{PROP}$	92.9	%
Space Heating Volume Weighted Return Temperature	VWART <sub>SH</sub>	43	°C
DHW Volume Weighted Return Temperature	VWART <sub>DHW</sub>	15	°C
Keep Warm Volume Weighed Return Temperature	VWART <sub>KWM</sub>	37	°C
Annual Volume Weighted Return Temperature for Heating Period	VWART <sub>HEAT</sub>	41	°C
Annual Volume Weighted Return Temperature for Non-Heating	VWART <sub>NONHEAT</sub>	27	°C
Total Annual Volume Weighted Return Temperature	VWART <sub>OVERALL</sub>	28	°C

**Table 5.4 – Low Temperature VWART Calculations** 

Description	Symbol	Value	Unit
Annual Heating Period Percentage	$SH_{PROP}$	7.2	%
Annual Non-Heating Period Percentage	$NSH_{PROP}$	93.0	%
Space Heating Volume Weighted Return Temperature	VWART <sub>SH</sub>	35	°C
DHW Volume Weighted Return Temperature	VWART <sub>DHW</sub>	16	°C
Keep Warm Volume Weighed Return Temperature	VWART <sub>KWM</sub>	37	°C
Annual Volume Weighted Return Temperature for Heating Period	VWART <sub>HEAT</sub>	35	°C
Annual Volume Weighted Return Temperature for Non-Heating	VWART <sub>NONHEAT</sub>	26	°C
Total Annual Volume Weighted Return Temperature	VWART <sub>OVERALL</sub>	26	°C



# 6 CONCLUSIONS

6.1.1 The appliance has passed the performance requirements of the BESA HIU Test Regime.



# 7 APPENDIX A

7.1	Kev	Metric	<b>Plots</b>
/.1	IVE	IAICTLIC	1 1013

7.1.1 The graphical plots of the key metrics of the tests described in this report are given in this section.

GRAPHICAL PLOTS START ON NEXT PAGE



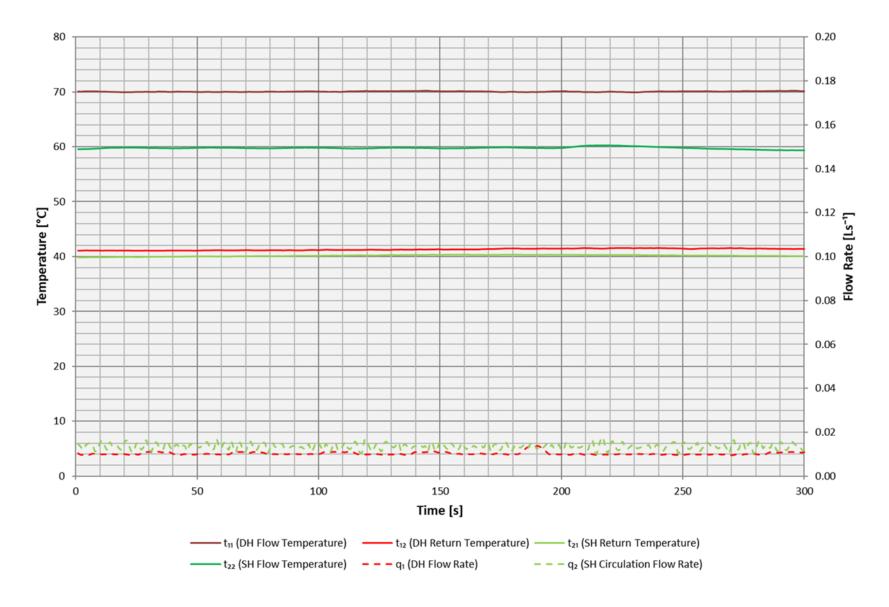


Figure 7.1 - Test 1a - Space Heating 1 kW at 70 °C



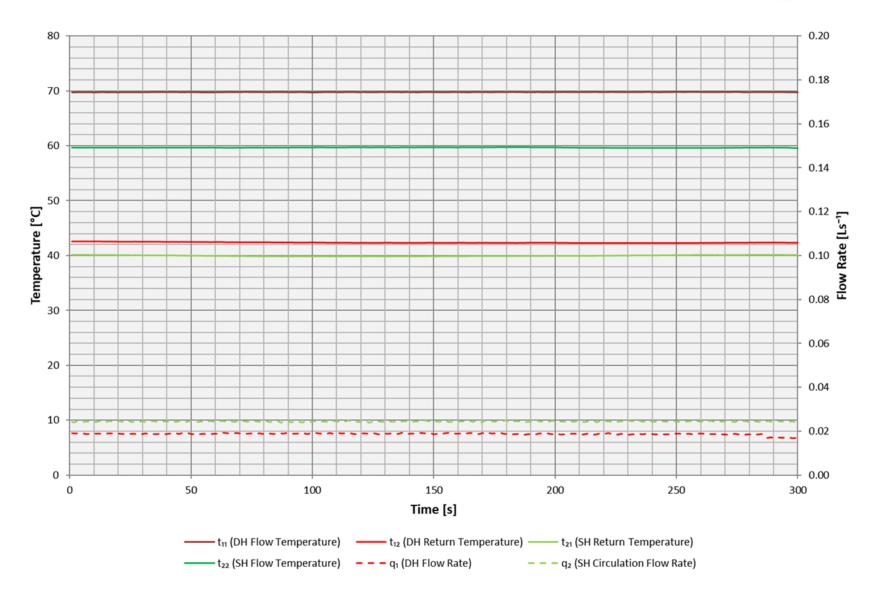


Figure 7.2 - Test 1b - Space Heating 2 kW at 70 °C



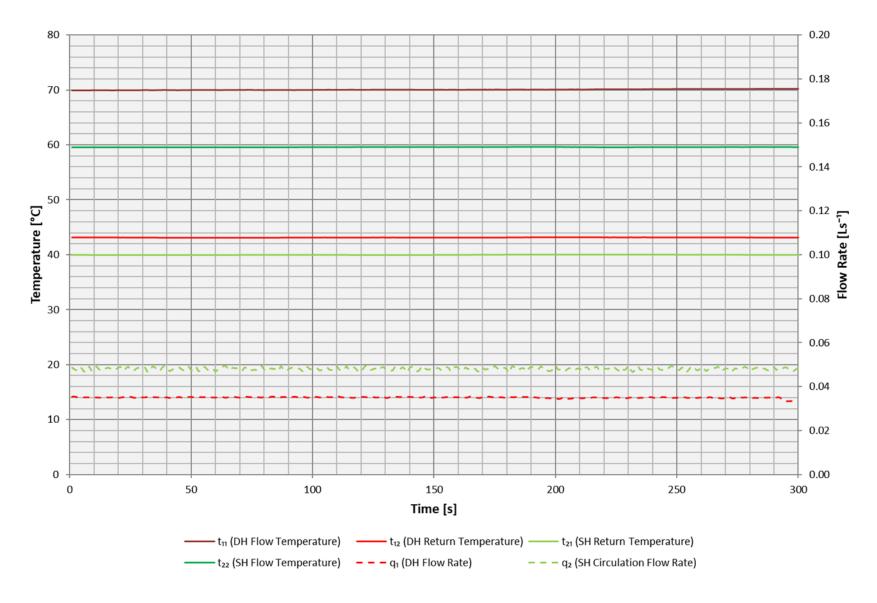


Figure 7.3 - Test 1c - Space Heating 4 kW at 70 °C



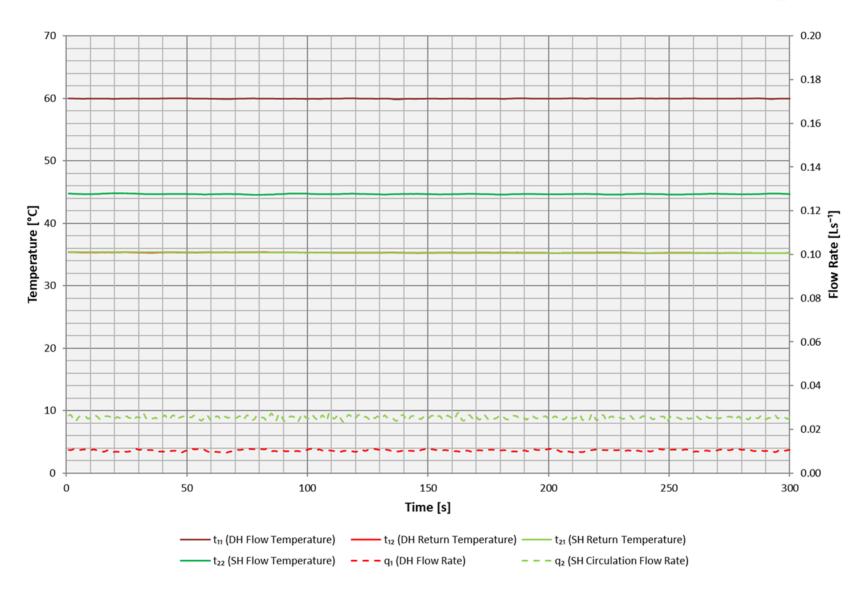


Figure 7.4 - Test 1d - Space Heating 1 kW at 60 °C



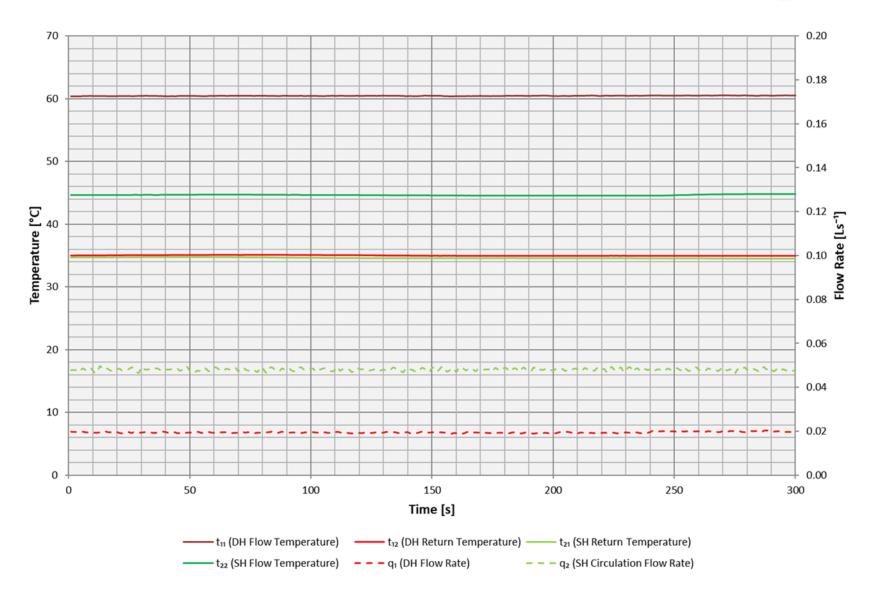


Figure 7.5 - Test 1e - Space Heating 2 kW at 60 °C



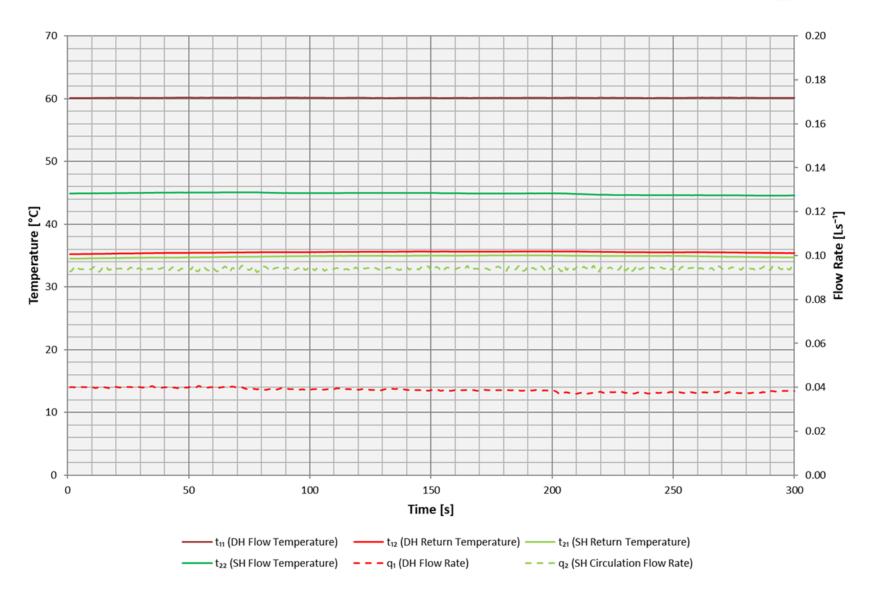


Figure 7.6 - Test 1f - Space Heating 4 kW at 60 °C



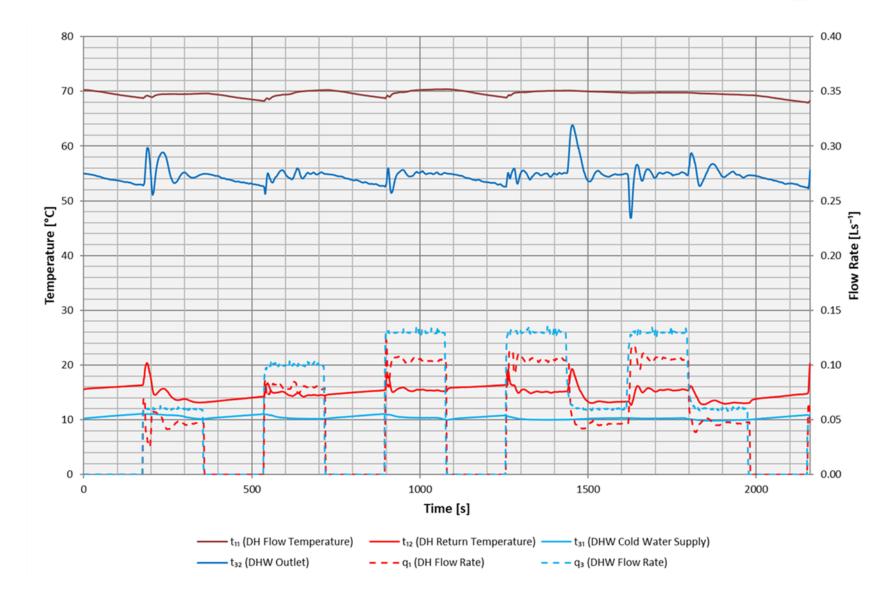


Figure 7.7 - Test 2a - DHW only at 70 °C



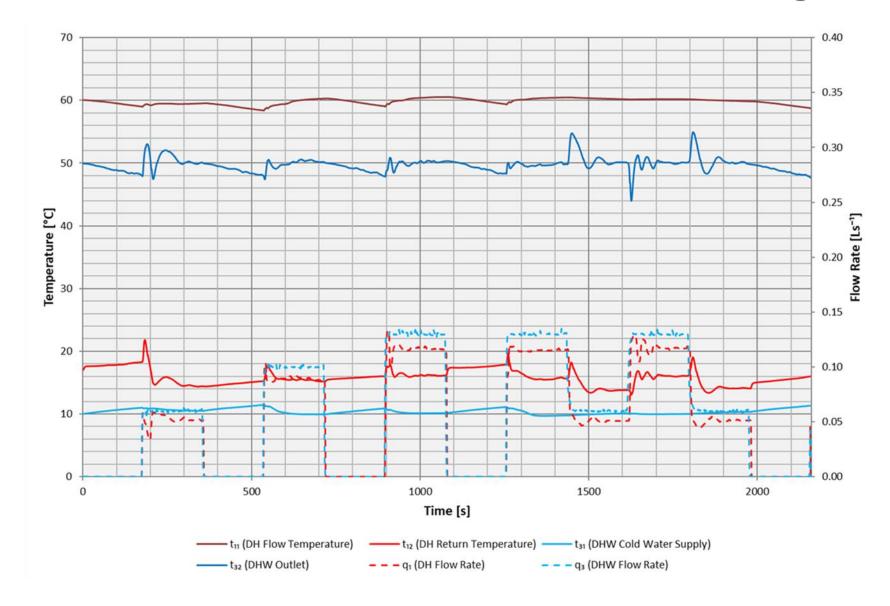


Figure 7.8 - Test 2b - DHW only at 60 °C



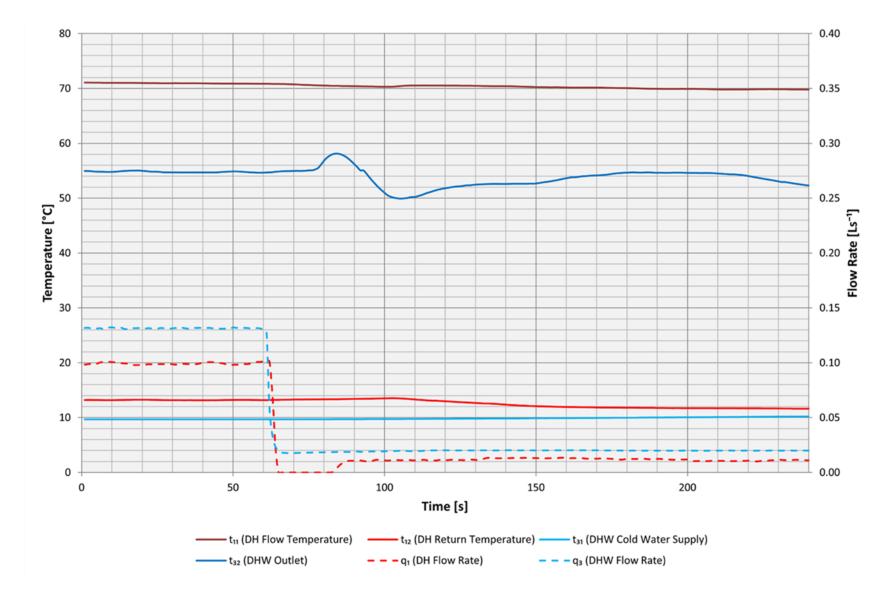


Figure 7.9 - Test 3a - Low Flow DHW at 70 °C



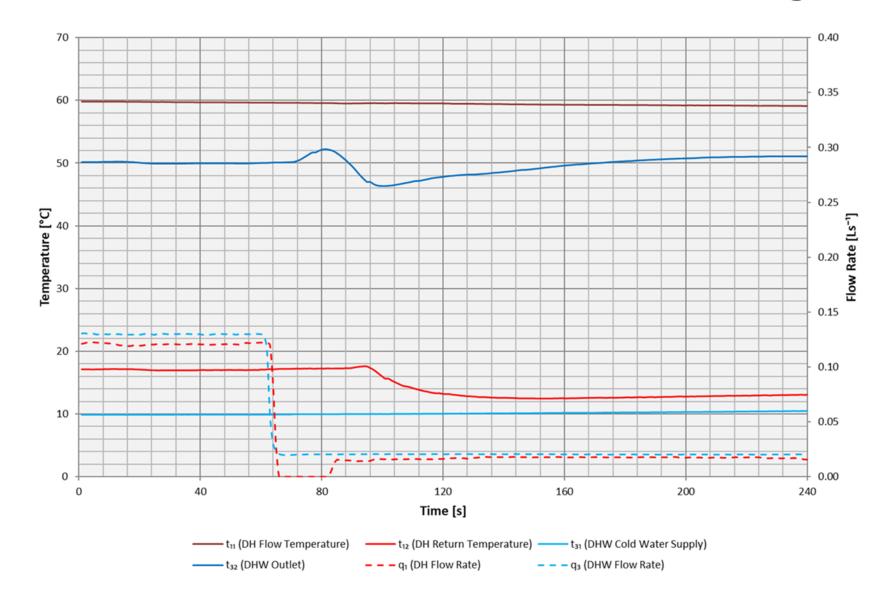


Figure 7.10 - Test 3b - Low Flow DHW at 60 °C



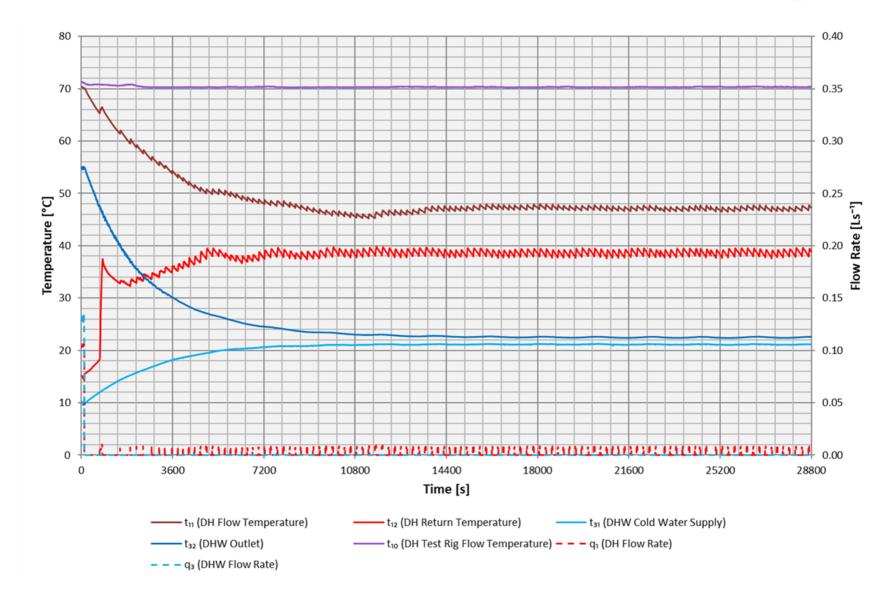


Figure 7.11 - Test 4a - Keep-Warm at 70 °C



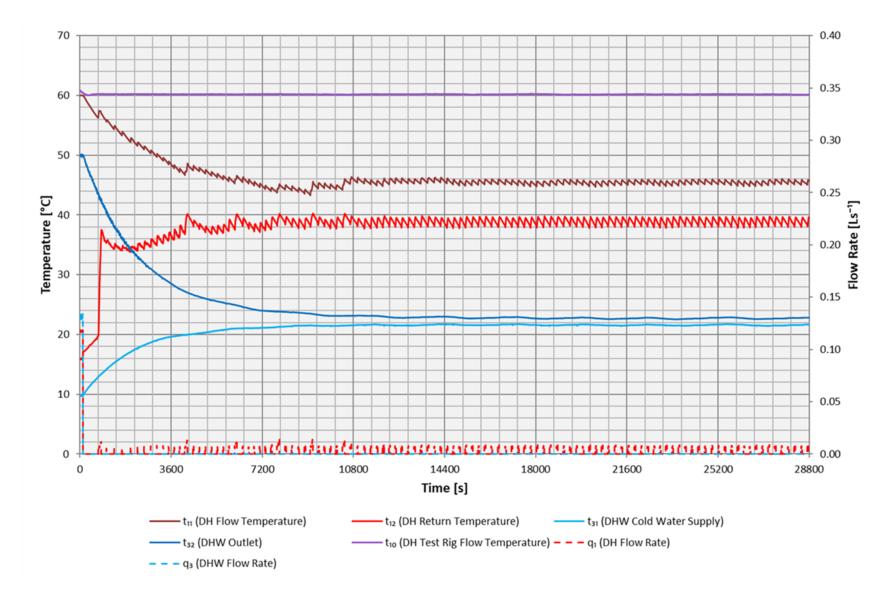


Figure 7.12 - Test 4b - Keep-Warm at 60 °C



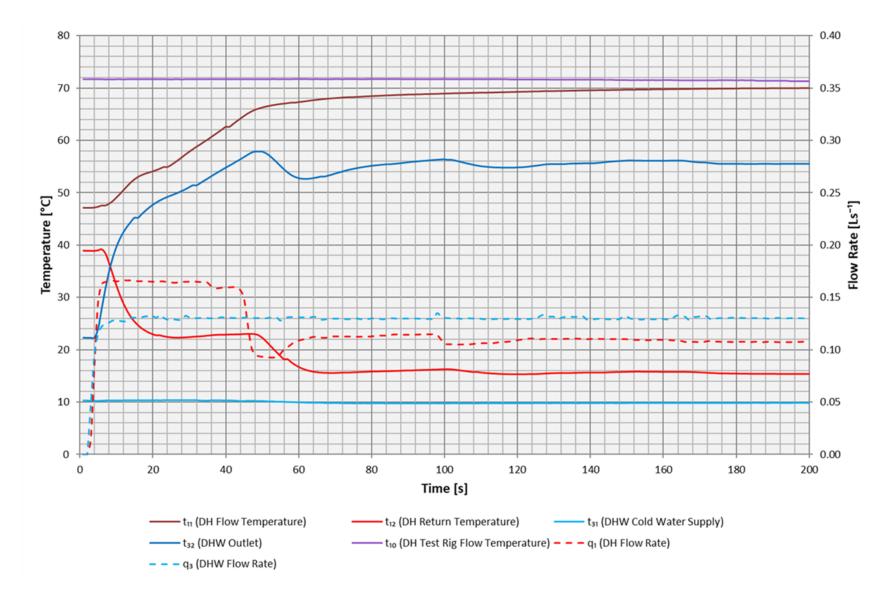


Figure 7.13 - Test 5a - DHW Response Time at 70 °C



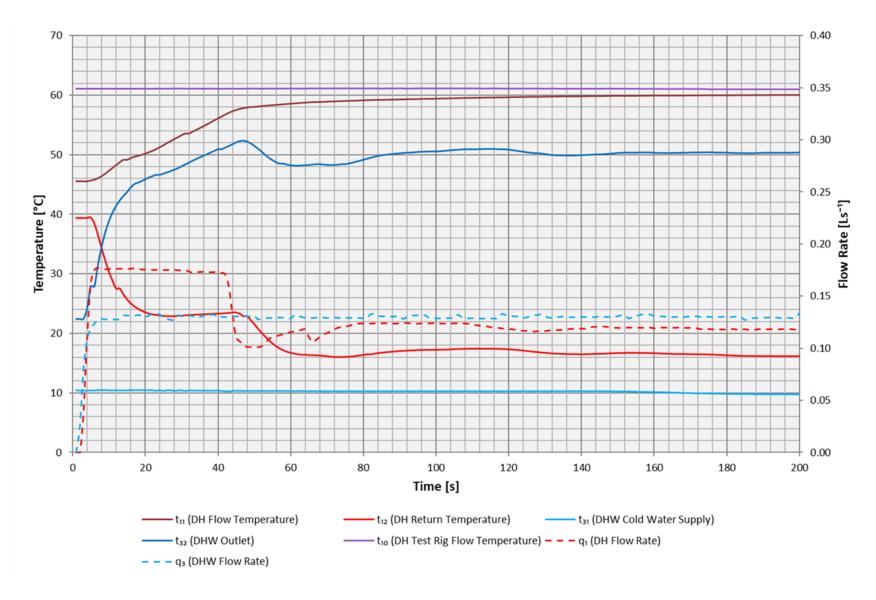


Figure 7.14 - Test 5b - DHW Response Time at 60 °C



## 7.2 Key Metric and VWART Summary

7.2.1 The summary tables of the key metrics and VWARTs of the tests described in this report are given in this section.

SUMMARY TABLES START ON NEXT PAGE





### **VWART Calculation with Keep Warm**

Test carried out by Enertek International for High Temperature BESA Tests

Manufacturer: Baxi Heating Ltd

Model: Assure HiMax Twin ID 90/30

Serial number: TJB22081000AR
Calculation performed by S.Broxham of Enertek on: 05/07/2022

actuation performed by 3.bioxilain of Effected on.

	VWART (°C)	Volume (m3)
DHW	15	31.6
Standby	37	27.1
Space Heating	43	47.8

VWART with keep warm active

Period	VWART (°C)	% Time
No Heating	27	93%
Heating	41	7%
Overall	28	

Primary Flow Temperature: 70°C DHW Setpoint: 55°C

Space Heating Temperature: 60/40°C

					Test Re	sults			
		Power	Primary flow	VWART	Energy Used	Annual Operation	Volume	Events	Average duration
		[W]	[m³/hr]	[°C]	[kWh]	[Hours]	[m³]	[Per Year]	[Seconds]
1kW Space Heating	1a	1211	0.037	41	108	89.0	3.33	-	-
2kW Space Heating	1b	2073	0.067	42	811	391.1	26.36	-	-
4kW Space Heating	1c	3946	0.126	43	565	143.2	18.09	-	-
DHW Low Flow Rate	2a	11017	0.006	14	705	66.2	11.12	-	-
DHW Medium Flow Rate	2a	18379	0.009	15	295	16.2	4.65	-	-
DHW High Flow Rate	2a	23919	0.008	15	444	18.6	6.92	-	-
DHW Post Low Flow Rate	2a	-	0.274	15	-	-	0.08	10000	30
DHW Post Medium Flow Rate	2a	-	0.361	15	-	-	0.00	660	70
DHW Post High Flow Rate	2a	-	0.351	15	-	-	0.00	300	145
DHW Keep Warm Standby	4a	•	0.003	37	-	8035.8	27.11	-	-

Table 7.1 - Key Metrics of High Temperature Package





### **VWART Calculation with Keep Warm**

Test carried out by Enertek International for Low Temperature BESA Tests
Manufacturer: Baxi Heating Ltd
Model: Assure HiMax Twin ID 90/30
Serial number: TJB22081000AR

Calculation performed by S.Broxham of Enertek on: 05/07/2022

	VWART (°C)	Volume (m3)
DHW	16	30.5
Standby	37	24.8
Space Heating	35	51.0

VWART with keep warm active

Period	VWART (°C)	% Time			
No Heating	26	93%			
Heating	35	7%			
Overall	26	_			

Primary Flow Temperature: 60°C
DHW Setpoint: 50°C
Space Heating Temperature: 45/35°C

		Test Results							
		Power	Primary flow	VWART	Energy Used	Annual Operation	Volume	Events	Average duration
		[W]	[m³/hr]	[°C]	[kWh]	[Hours]	[m³]	[Per Year]	[Seconds]
alwa u e		4074	0.000	25		07.5	2.55		
1kW Space Heating	1d	1071	0.038	35	104	97.5	3.66	-	-
2kW Space Heating	1e	2074	0.070	35	808	389.6	27.38	-	-
4kW Space Heating	1f	3984	0.140	36	569	142.8	19.94	-	-
DINAL Flam Bata	21-	450	0.000	45	405	4620.7	0.50		
DHW Low Flow Rate	2b	450	0.006	15	485	1620.7	9.59	-	-
DHW Medium Flow Rate	2b	613	0.007	16	170	484.6	3.31	-	-
DHW High Flow Rate	2b	708	0.013	18	391	627.3	8.04	-	-
DHW Post Low Flow Rate	2b	-	0.296	15	-	-	6.84	10000	30
DHW Post Medium Flow Rate	2b	-	0.383	16	-	-	1.37	660	70
DHW Post High Flow Rate	2b	-	0.400	17	-	-	1.37	300	145
DHW Keep Warm Standby	4b	-	0.005	37	-	5397.4	24.82	-	-

**Table 7.2 - Key Metrics of Low Temperature Package** 



# 8 APPENDIX B

## 8.1 Appliance Documentation

8.1.1 The details of the appliance documentation are given in Table 8.1 below.

Table 8.1 – Documentation Supplied

	Component:	Document Submitted (Y/N):	Manufacturer and type:
1	Space Heating Heat Exchanger	Υ	Zilmet 17B315 18 Plates
2	Domestic Hot Water Heat Exchanger	Υ	SWEP
3	Controller for Space Heating	Υ	Selco Inta
4	Control Valve and Actuator for Space Heating	Υ	Frese Optima OEM Cartridge
5	Space Heating Strainer	NA	N/A
6	Controller for Domestic Hot Water	Υ	Selco Inta
7	Control Valve and Actuator for Domestic Hot Water	Υ	Frese Fast Acting Actuator
8	Temperature Sensors	Υ	Nordgas
9	Domestic Hot Water Isolating Valve	NA	RBM and WRAS 2011345
10	Primary Side Strainer	NA	Installation Manual, PICV Inlet Block Assembly
11	Drain Valves	Υ	Rbm
12	Vent Valves	NA	Rbm
13	Circulation Pump set with AAV & PRV	Υ	Grundfos UPM3
14	Heat Meter	Υ	Zenner Zelsius C5-IUF
15	Domestic Hot Water Flow Sensor	Υ	Nordgas
16	Pipes	Υ	Copper
17	Connections	Υ	Flat Face with Gasket
18	Joints	NA	N/A
19	Gaskets	Υ	Fasit Omnia
20	Expansion Vessel	Υ	Zilmet
21	Insulation	Υ	N/A
22	Pressure Sensors	Υ	Ma-Ter
A1	'O' Ring	NA	Manufacturers Operating Manual
A2	Commissioning Guide	Υ	Manufacturers Operating Manual
A3	Operation Guides with a Function Description / Description of Operation and Care Instructions as Suited to the Intended User Category	Υ	Manufacturers Operating Manual
A4	Declaration of Conformity for CE-marked HIUs	N	
A5	Full Parameter List for Electrically Controlled HIUs	Υ	Manufacturers Operating Manual
	Maximum Primary Static Operating Differential Pressure	NA	Static - 16 bar
	Deactivation Procedure of the Internal SH Pump	NA	SH Pump was Unplugged
	Model Name and Type Number	Υ	Assure HiMax Twin ID 90/30
	Serial Number		TJB220810001AR



## 8.2 Appliance Photographs



Figure 8.1 – Photograph of Appliance [Case Fitted]





Figure 8.2 – Photograph of Appliance [Case Removed]





Product Type:

Customer Support : 0330 6780917

www.baxi.co.uk

Baxi Heating Ltd Brooks House Coventry Road Warwick, CV34 4LL England www.baxi.co.uk Assure HiMax Twin ID 90/30

	•		
Electrical Data for:  Max Rated Input:  Voltage Supply:  Frequency:  Electronics Casing:	Max Primary Flow Rate: Min Domestic Hot Water Flow Rate: Max Output with Max Primary Flow Rate at 85 °C:	Max Working Temperature:	Max Working (Rated) Pressure for: Primary System (District Heating): Secondary Heating System: Domestic Hot Water System:
52 W 230 V 50/60 Hz IP42	1300 72 80	85	10 3 16 10
H < ≷	I/h KW	ငိ	bar g bar g bar g





Serial Number



Figure 8.3 – Appliance Data Label



### 8.3 Calibrations and Uncertainties

8.3.1 A list of equipment, their calibrations and uncertainties are given in table 8.2 below.

**Table 8.2 - EIL Equipment Calibration and Uncertainties** 

Equipment Name	ID Number	Calibration Certificate	Measurement Uncertainty $K=2$ $\frac{U}{\sqrt{20}}$	Units	Calibration Date	Calibration Due
Flow Meter [Primary Flow Rate]	FM 601	K48376FW1S2	±0.0004	I/s	07/07/2021	07/2022
Flow Meter [DHW Flow Rate]	FM 602	K48378FW	±0.00305	l/s	07/07/2021	07/2022
Flow Meter [SH Flow Rate]	FM 603	K48377FW	±0.04871	l/s	06/07/2021	07/2022
Flow Meter [DHW Flow Rate]	FM 605	K48375FW	±0.00576	I/s	05/07/2021	07/2022
Pressure Transducer [Primary Supply]	PT 086	K48379P	±6.91	kPa	05/07/2021	07/2022
Pressure Transducer [Primary Return]	PT 085	K48384P	±8.54	kPa	05/07/2021	07/2022
Pressure Transducer [DHW Output Pressure]	PT 083	K48380P	±21.27	kPa	05/07/2021	07/2022
Pressure Transducer [DHW Cold Water Supply]	PT 084	K48383P2	±9.21	kPa	20/07/2021	07/2022
Pressure Transducer [SH Flow]	PT 087	K48382P	±7.10	kPa	05/07/2021	07/2022
Pressure Transducer [SH Return]	PT 088	K48381P	±15.24	kPa	05/07/2021	07/2022
PRT Probe [Primary Supply Temp]	PRT 4709	443851	±0.6	°C	10/07/2021	07/2022
PRT Probe [Primary Return Temp]	PRT 4708	443851	±0.6	°C	10/07/2021	07/2022
PRT Probe [DHW Output Temp]	PRT 4711	443852	±0.6	°C	10/07/2021	07/2022
PRT Probe [Cold Water Supply Temp]	PRT 4710	443852	±1.91	°C	10/07/2021	07/2022
PRT Probe [SH Supply Temp]	PRT 4707	443851	±0.57	°C	10/07/2021	07/2022
PRT Probe [SH Return Temp]	PRT 4706	443851	±1.06	°C	10/07/2021	07/2022



Equipment Name	ID Number	Calibration Certificate	Measurement Uncertainty $K=2$ $U$ $\sqrt{20}$	Units	Calibration Date	Calibration Due	
Pressure Transducer [Static Pressure Test]	PT 090	U100553-19	±50	kPa	11/2020	11/2022	
Power Meter [Electrical Consumption]	PM1022	U103585-20	±1.03	W	28/07/2021	09/2022	
Software		VERSION – LabVIEW, Version 5, Service pack 1					



Report Issue No	Reason for Report Update
1	Original Issue
2	WRAS Numbers updated section 8.1.1 & photo of appliance updated.



